

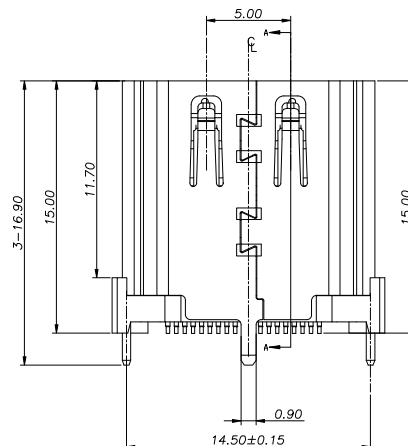
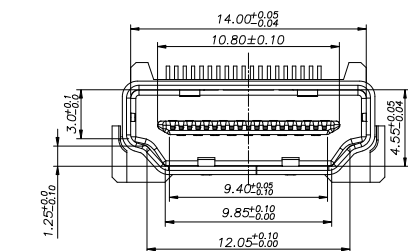


Assembly cover

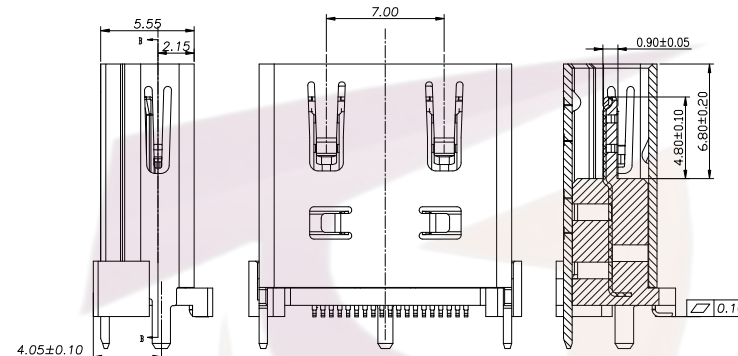

SECTION A-A

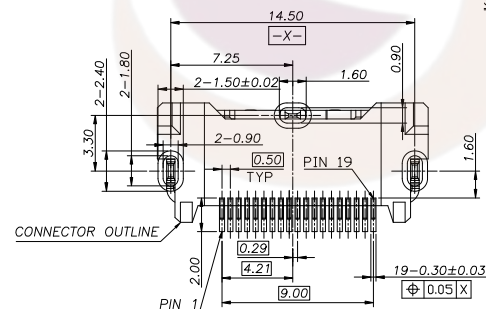

RECOMMENDED P.C.B. LAYOUT (T:1.20~1.60mm)
TOLERANCE UNSPECIFIED ±0.05mm

NOTES:

1.MATERIAL:

- 1-1 HOUSING:LCP WITH 30% G/F UL 94V-0 COLOR:BLACK.
- 1-2 CAP:LCP WITH 30% G/F UL 94V-0 COLOR:BLACK.
- 1-3 TERMINAL:COPPER ALLOY T=0.20mm
- 1-4 SHELL:SPCC/COPPER ALLOY T=0.50mm

2.PLATING:

- 2-1 TERMINAL:
(SEE P/N.)GOLD PLATED ON CONTACT AREA
AND 100μ" MIN. MATTE-TIN ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 80μ" MIN.NICKEL.
- 2-2 SHELL:50μ" MIN. NICKEL PLATED.

3.MECHANICAL PERFORMANCE

- 3-1 INSERTION FORCE: 4.5kgf MAX
- REMOVAL FORCE: 1kgf MIN; 4.0kgf MAX
- DURABILITY:5000 CYCLES

4.ELECTRICAL PERFORMANCE:


- 4-1 Current Rating: 0.5A
- 4-2 Voltage Rating: 40V AC
- 4-3 CONTACT RESISTANCE:INITIAL 30mΩ MAX.
AFTER TEST:Δ10 mΩ MAX
- 4-4 DIELECTRIC STRENGTH:UNMATED CONNECTORS APPLY 500V AC
MATED CONNECTOR APPLY 300V AC
- 4-5 INSULATION RESISTANCE:100 MEGAOHMS MIN.(UNMATED)
10 MEGAOHM'S MIN.(MATED)

5.ENVIRONMENTAL PERFORMANCE:

- OPERATING TEMPERATURE: -25°C~+85°C
- SALT SPRAY:24H

6. P/N. TJD01-3193K-00BR

- 1: GOLD FLASH PLATING ON CONTACT AREA ,
MATTE TIN 100u" Min ON SOLDER AREA
- 3: 3u" GOLD PLATING ON CONTACT AREA ,
MATTE TIN 100u" Min ON SOLDER AREA



SECTION B-B

PIN	Signal Assignment	PIN	Signal Assignment
1	TMDS Data2+	2	TMDS Data2 Shield
3	TMDS Data2-	4	TMDS Data1+
5	TMDS Data1 Shield	6	TMDS Data1-
7	TMDS Data0+	8	TMDS Data0 Shield
9	TMDS Data0-	10	TMDS Clock+
11	TMDS Clock Shield	12	TMDS Clock-
13	CEC	14	Utility
15	SCL	16	SDA
17	DDC/CEC Ground	18	+5V Power
19	Hot Plug Detect		

Guangdong Tengjun Electronic Technology Co., Ltd

Website:

<https://www.tengjunconn.com>

TEL:

0769-23323869



PART NAME HDMI 直立贴板母座(H=15.0MM)侧弹片

PART NO. TJD01-3193K-00BR

TOLERANCE UNLESS OTHERWISE SPECIFIED:
X ±0.2
X.X ±0.15
X.XX ±0.10
X.XXX ±0.050

DRAWING:

Li

DATE:

2019.11.12

SCALE

SHEET

REV A0

CHECK:

Chen

DATE:

2019.11.12

1:1

1/2

SIZE: A4


APPROVAL:

Yuan


DATE:

2019.11.12



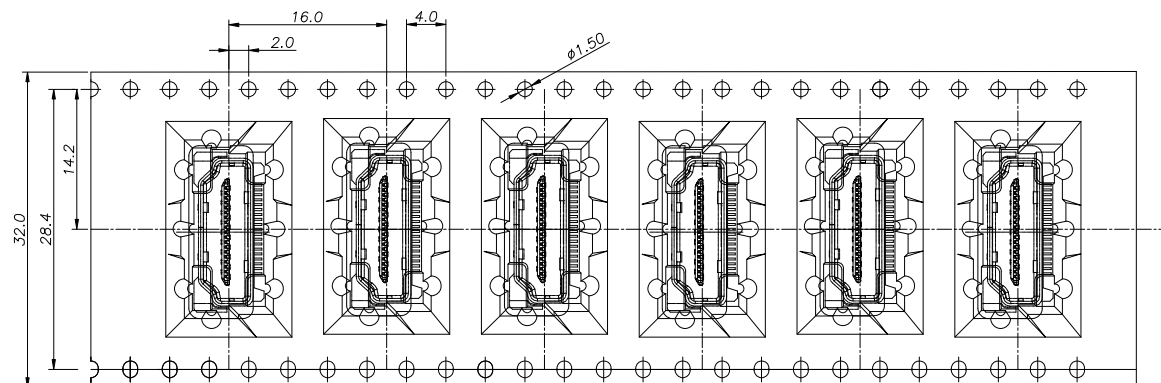

NO. 1




NO. 2

1. 包装要求:
- 1.1 每卷包装300pcs, 卷带前后各空出10pcs位置;
 - 1.2 每10盘放一箱, 共计3ksets;
 - 1.3 纸箱外贴上标签


备注:

1. 若有未装满之零数, 必须用泡棉塞满。
2. 针对于包装方式可根据客户要求包装。




纸箱规格: 39.5*39.5*38cm

NO. 4

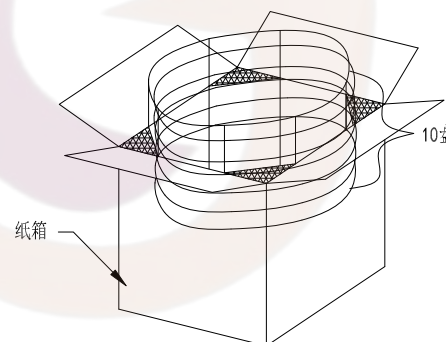

NO. 3

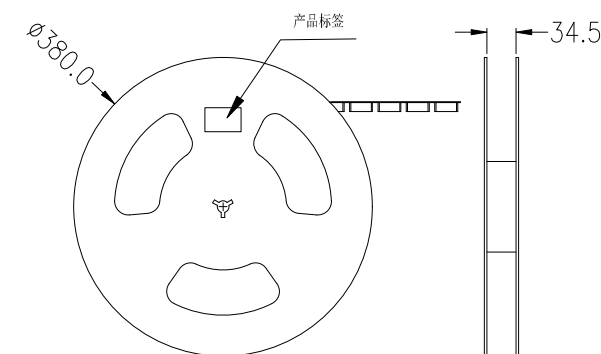

Guangdong Tengjun Electronic Technology Co., Ltd

Website:

<https://www.tengjunconn.com>

TEL:

0769-23323869



PART NAME

HDMI 直立贴板母座(H=15.0MM)侧弹片

PART NO.

TJD01-3193K-00BR

TOLERANCE UNLESS OTHERWISE SPECIFIED:
X ±0.2
X.X ±0.15
X.XX ±0.10
X.XXX ±0.050

DRAWING:

Li

DATE:

2019.11.12

SCALE

SHEET

REV A0

CHECK:

Chen

DATE:

2019.11.12

1:1

2/2

SIZE: A4

APPROVAL:

Yuan

DATE:

2019.11.12

☐